


Family of antennas AD-26/C is intended for use with portable and manpack radios within VHF frequency band. The antenna is composed of several thin wall stainless steel sections connected with elastic rope. Elastic rope tension enables good electrical contact between sections and quick deployment of the antenna within seconds. The antenna consists also a special grip tape for packing when not in use. Version of AD-26/C-GN contains also a special “goose-neck” enables vertical position of the antenna irrespective of position of radio set. Antenna is available in different heights (max. 3220 mm) and with different types of thread connectors (5/8”-18UNF as standard or by request).



TECHNICAL DATA	AD-26/C	AD-26/C-GN
Frequency range	30 - 90 MHz	30 - 90 MHz
Maximum power	50 W	50 W
Polarization	VER.	VER.
Connector	thread 5/8”-18UNF (or by request)	thread 5/8”-18UNF (or by request)
Height	max. 3035 mm	max. 3220 mm
Weight	max. 0,350 kg	max. 0,5 kg
Temperature range	- 40....+70 °C	- 40....+70 °C

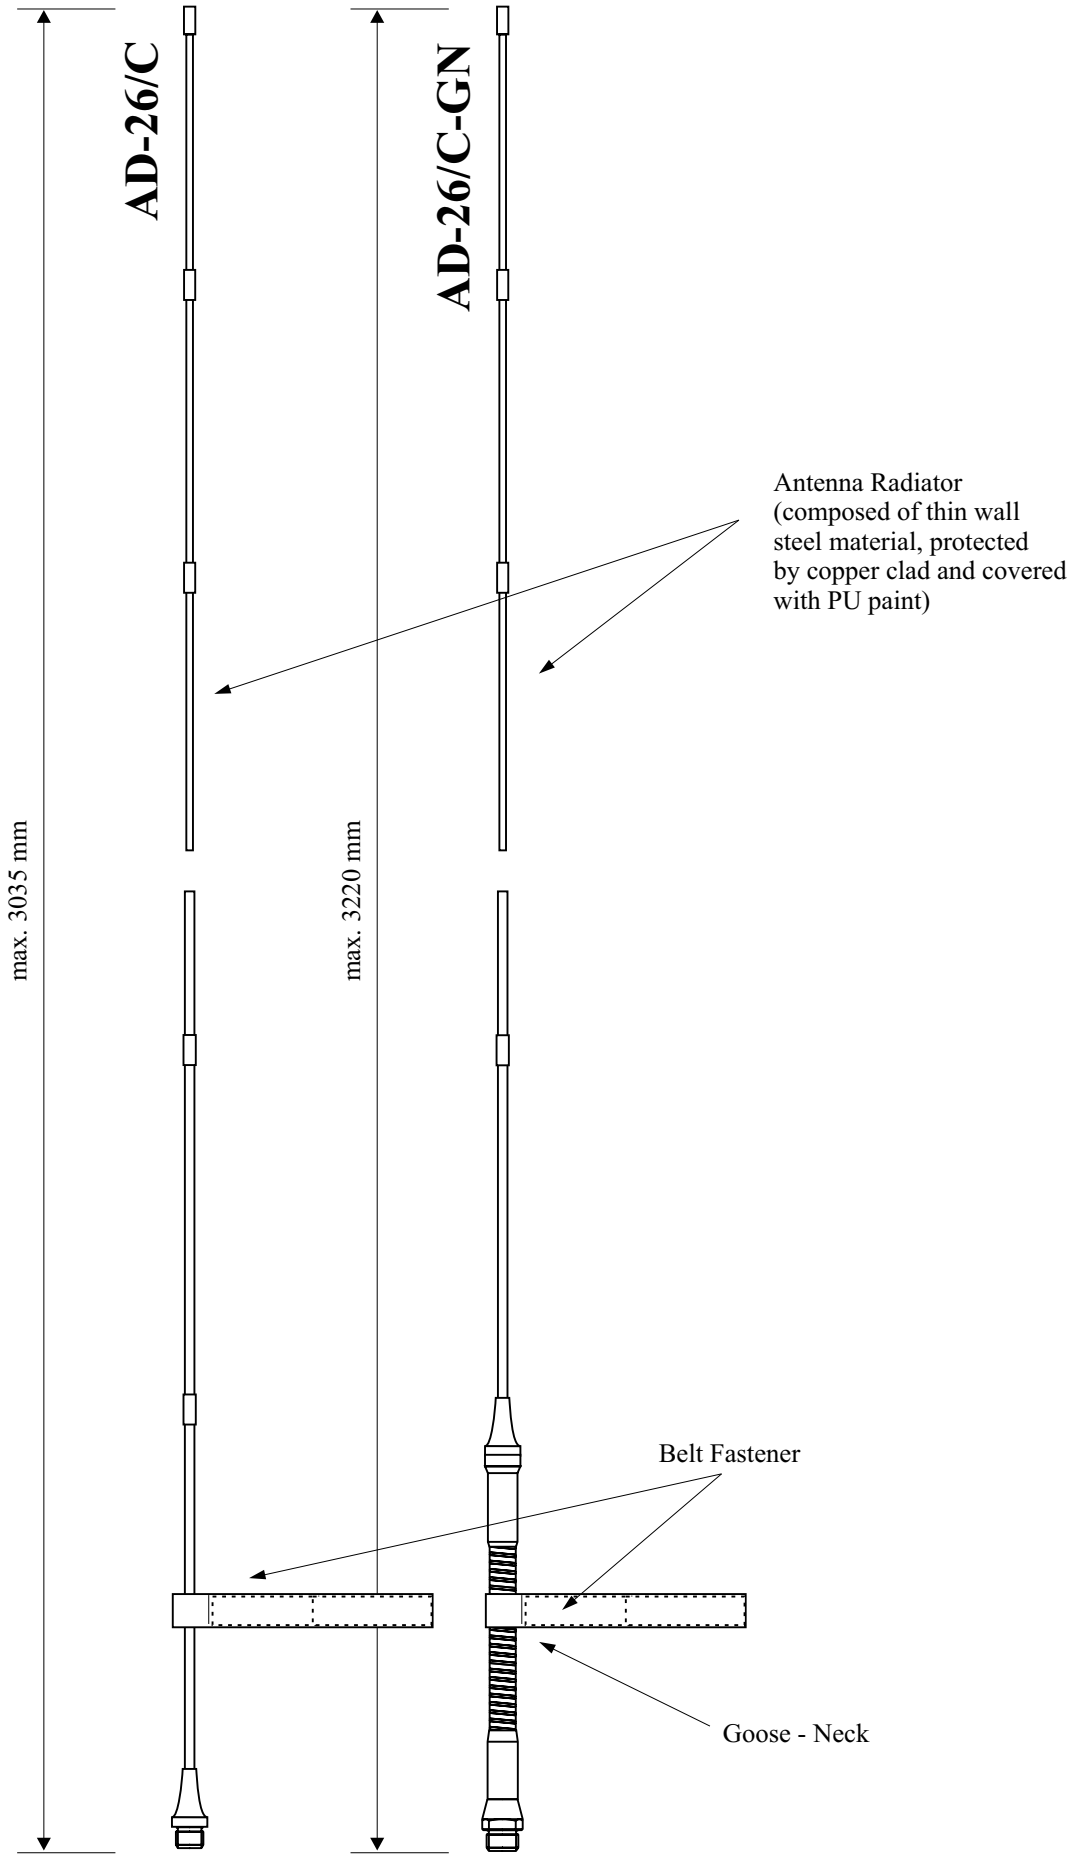

AD-26/C

AD-26/C-GN

max. 3035 mm

max. 3220 mm

Antenna Radiator
(composed of thin wall
steel material, protected
by copper clad and covered
with PU paint)

Belt Fastener

Goose - Neck